

## Resurfacing Requirements

The table below shows the history of the carriageway treatments of each site and the proposed requirements.

Any surface dressing requirements within 1-2 years will be funded by SGC in 2018. The preparation work for these sites will be carried out in 2017 funded by the challenge fund bid.


Any site that does not require immediate intervention will not be resurfaced at this current time but will be part of South Gloucestershire's long term programme.

<u>Site Name</u>	<u>Last Treatment</u>	<u>Proposed treatment</u>	<u>Time Scale</u>	<u>Est Cost 2017/18</u>	<u>Est Cost 2018/19</u>	<u>Estimated Total Cost</u>
A420 High St, Wick	HRA – 2011	Surface Dressing	5-7 years			
A431 Swineford	SMA – 2005	HRA Inlay	1-2 years	£80,000		£80,000
A4175 Oldland	Unknown	Pre Patch and Surface Dress	2-3 years	£15,000	£45,000	£60,000
B4058, High St, Winterbourne	SMA – 2005	Patch & HRA Inlay	1-2 years	£180,000		£180,000
B4058 Bagstone Rd	Surface Dress – June 2011	Re Texture	1-2 years	£40,000		£40,000
Abson Road, Wick/Pucklechurch	Unknown	Pre patch and Surface Dress	1-2 years	£50,000	£90,000	£140,000
Oldbury Lane, Oldbury	Unknown	Pre patch and Surface Dress	1-2 years	£75,000	£65,000	£140,000
Church Lane, Oldbury	Surface Dress – Aug 2010	Surface Dressing	3-4 years			
Beckspool Road, Frenchay	SMA – 2011	Surface Dressing	3-4 years			
			<b>Total</b>	<b>£440,000</b>		

## A420 High Street Wick

Resurfaced in 2011 (50mm thick HRA). Proposed surface dressing programme in 5-7 years time.

No action required at current time.

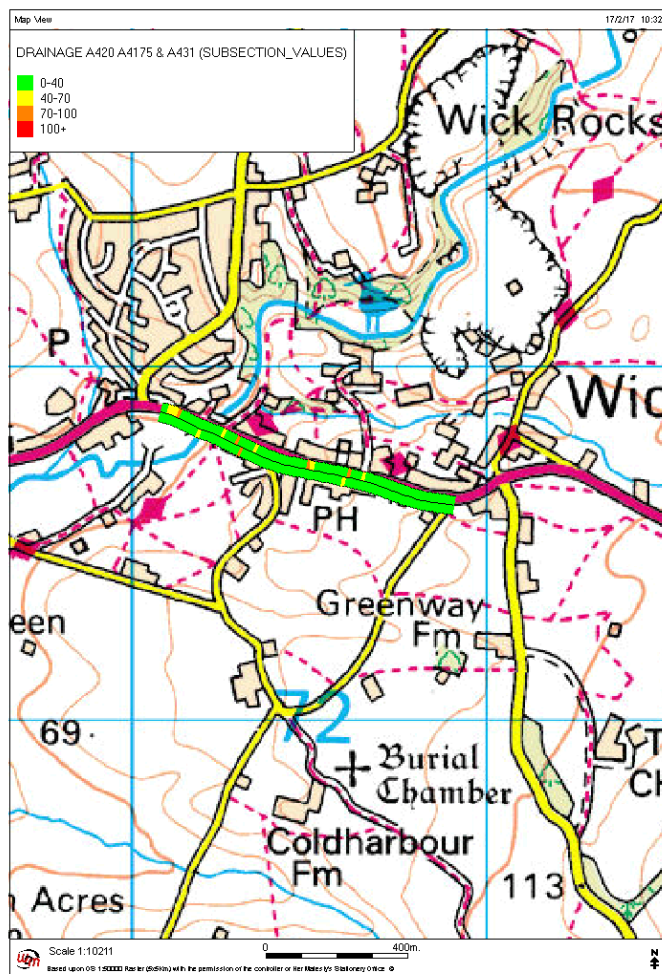


Poor surface course and will need to be resurfaced within two years.






## A4175 Cherry Garden Road

Satisfactory HRA surface course showing signs of deterioration. Some limited patching can be carried out in 2017 for a surface dressing site in 2018.

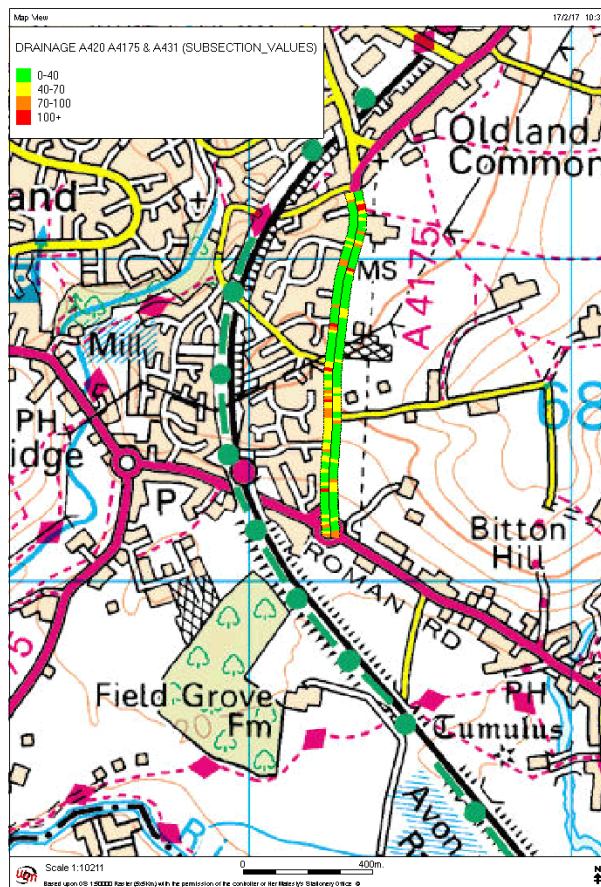

## B4058 Bagstone Road


Surface Dressed in 2011 and is in satisfactory condition. There is some fattening up in certain areas and surveys show a low texture reading. A hydro-retexture treatment would resolve the low texture issues.

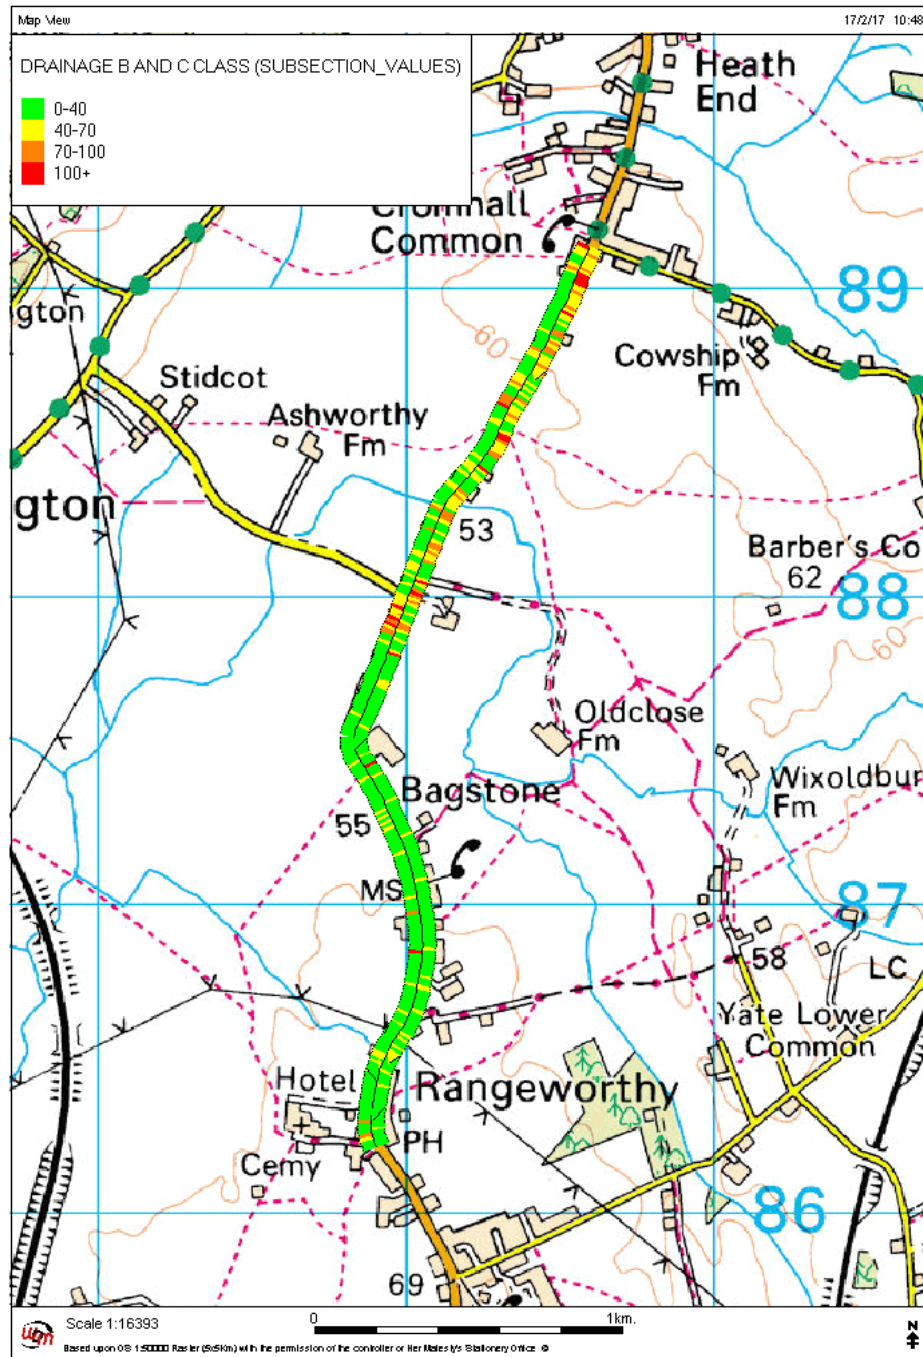




## 4058 High Street Winterbourne

Resurfaced in 2005 and showing signs of significant structural failures in certain areas. The road will need to be resurfaced in 1 to 2 years time which will incorporate some reconstruction.

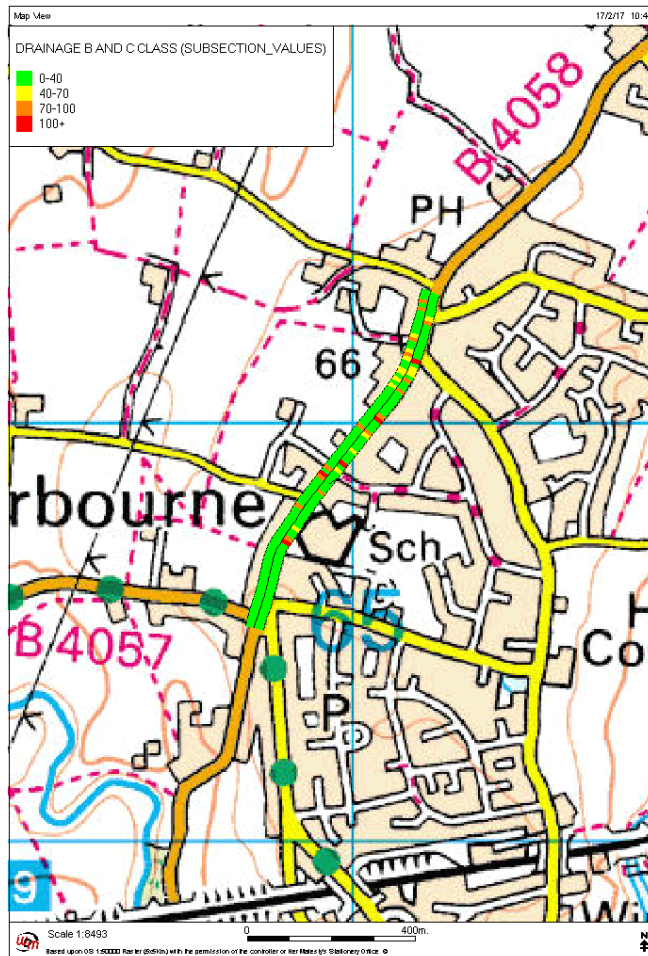

## Abson Road, Wick/Pucklechurch


Abson Road is scheduled to be surface dressed within the next 2-3 years. This will include preparation (pre patching) work. SGC will incorporate the dressing in the 2018 capital programme.

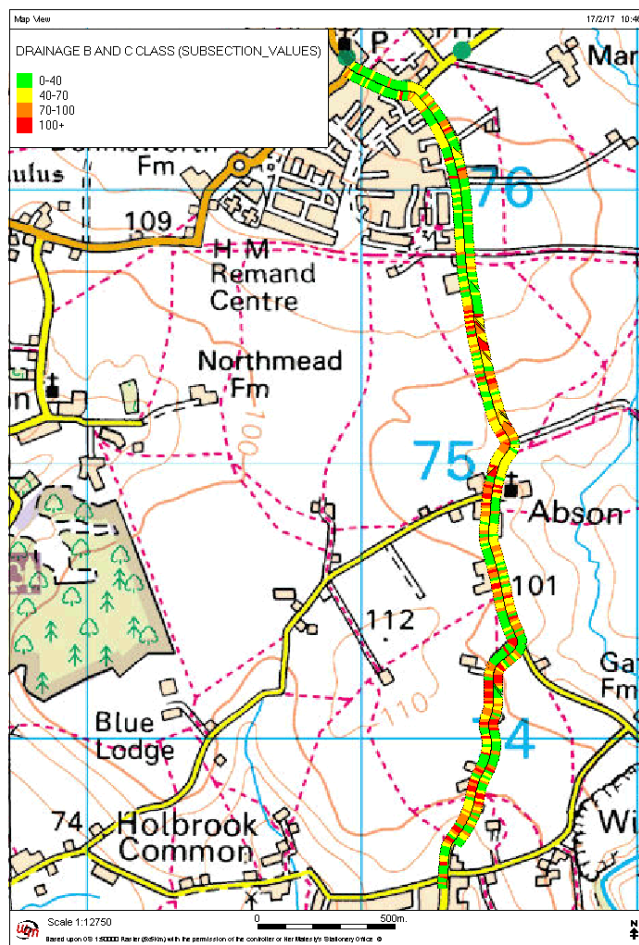



## Oldbury Lane, Oldbury

Oldbury lane is in need of surface dressing within 1-2 years. There are significant structural issues along certain lengths of this road. SGC will incorporate the dressing in the 2018 capital programme.

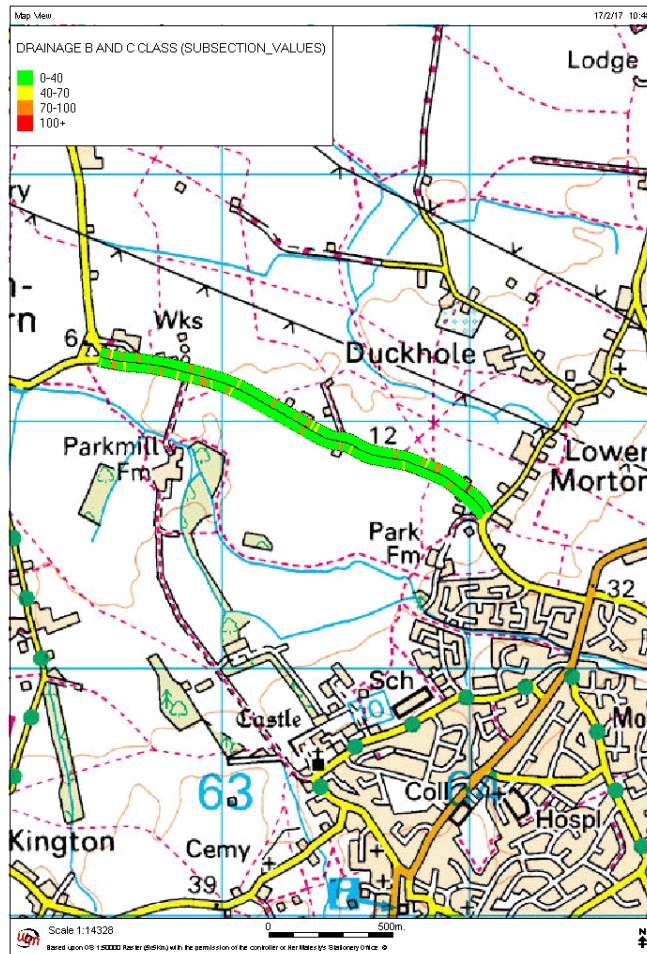



## Church Lane, Oldbury

This site was surface dressed in 2010. It will need re-dressing in 3-4 years time. No action required at this time.



## Beckspool Road, Frenchay

This site was surfaced (SMA 40mm thick) in 2011. No action required at this time.

